



[Wood fireplaces](#) » [ART-10](#) » [Technical data](#)

model 3 of 27




Technical data ART-10

Output

Rated heat output	10 kW
Heat level min/max per hour	3-11 kW
Wood feed quantity per hour	3 kg
Room heating capacity	300 m³

[print version](#)

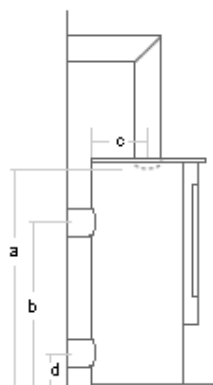

Symbol image installation dimensions

Size in mm

Stove height	1790
Top plate width	490
Floor plate width	490
Top plate depth	430
Floor plate depth	430
Firebox height, width depth	670-320-275
Ø flue tube	150

Installation size in mm

a - Top tube height (without swivel mechanism)	1338
b - Rear tube height Φ	1536
c - Distance of top tube to rear wall	210
d - Height of AIR system connection (Ø 100mm)	or below

Relevant information for the chimney-sweep

Triple values	6.4/250/0.12/- ?
EN 13240	RRF-40092087
VKF no.	19353 (Assoc. of Cantonal Fire Insurance)
DIBt	...

Ecology

Fine dust mg/Nm³	29
CO2 mg/Nm³	875

Downloads

Building Regulations: safety distances (german text)

Sicherheitsabstaende.pdf (91.86 KB)

Colours of tiles

Keramik_Einleger_e.pdf (1418.75 KB)

Information fresh air system

AIR_Faktenblatt_engl.pdf (215.5 KB)

Operating manual

Bedienungsanleitung_(...).pdf (150.83 KB)

Get Acrobat Reader: www.adobe.com



Available features and model types

Standard features Options

	ART-10
Casing	lacquered steel
Stove weight in kg	302
Top plate, lacquered steel	●
Top plate, soapstone	-
Top plate, tile	-
Top plate, stainless steel	-
Pivot function	○
Special oven support for easy rotation	○

Sliding door	●
Air-cooled door handle	●
Handle can be used without gloves	●
Soap stone heat reserve insert	○ 105 kg (exit above)/60 kg (exit in the back)
Grill grate with removable handle, medium (20 x 25 cm)	○
Smoke exit above	●
Smoke exit in the back	○
AIR	○
AIR trough the floor	○
Construction type 1	○
Construction type 2	○
Steel colours	Black
Tiles colours	-

[send link](#)